



GU PATROL Door Bracket Extension

Suitable for GU Patrol series rear door.
The bracket will allow for the rear door to
open further, allowing for greater rear
access.

Step 1

Open rear door

Step 2

Remove the Original Bracket, by unscrewing
the M8 bolt.

Step 3

Grind or file the underside of the pivot pin—to
allow for removal. Ensure that the vehicle
components and surrounding area are covered
if grinding. Ensure all relevant recommended
personal protection equipment is worn as re-
quired.

Step 4

Temporarily re-fit the Original Bracket, and re-
move the pivot pin. Once pivot pin is removed,
Original Bracket will come free from hinge arm.

Step 5



Fit Replacement Bracket with the M8 bolt
(removed in Step 2). Use the appropriate
mounting location for your vehicle.

Step 6

Ensure the replacement bracket is horizontal
before securing with the supplied Self Tapping
Screw.

Step 7

Refit the hinge arm to the Replacement
Bracket. Fit the supplied M8 Socket Head Cap
Screw & tighten, to secure the hinge arm to the
Replacement Bracket. Please do not over
tighten... or the door will be stiff! **Tighten only
enough to allow free movement of the hinge**

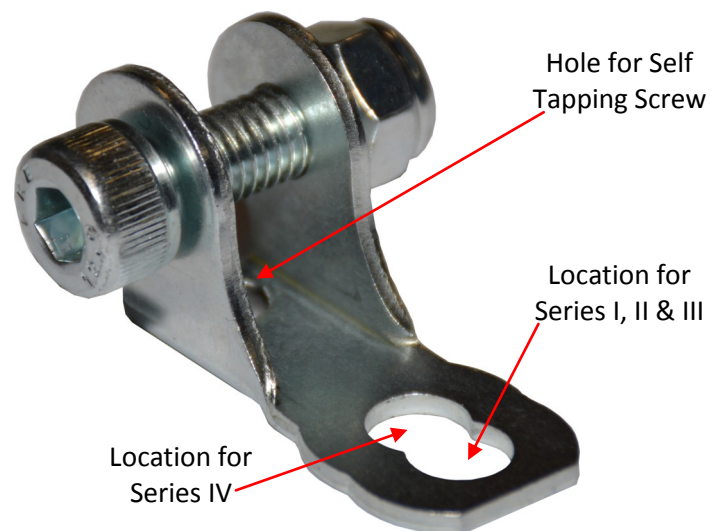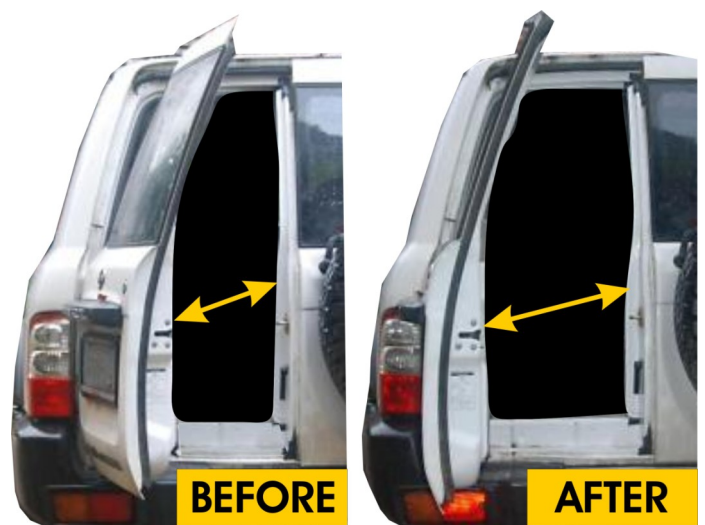

Kit Contents

- 1 x Replacement Bracket
- 1 x Self Tapping Screw
- 1 x M8 Socket Head Cap Screw
(replacement pivot pin)