




ROADSAFE EXTENDED SHACKLES – PIN TIGHTENING INSTRUCTIONS

The large nut on the grease nipple side of the pin is a LOCK NUT ONLY (In place for Grease Nipple Protection). This nut only needs to be nipped up, it does not need to be tightened to hold the shackle in place.

To tighten pins, only tighten the SMALL NUT. The other end of the pin is fixed into the plate via a thread. Tightening the SMALL NUT, in turn tightens the pin at the other end into the plate. DO NOT APPLY A RATCHET OR SHIFTER TO THE LARGE LOCK NUT (ON GREASE NIPPLE END OF THE PIN) DURING TIGHTENING.

TIGHTENING INCORRECTLY WILL RESULT IN THE PIN BREAKING AT THE GREASE NIPPLE END OF THE PIN. THIS BREAKAGE IS A RESULT OF INCORRECT FITMENT, AND WILL NOT BE COVERED BY WARRANTY.

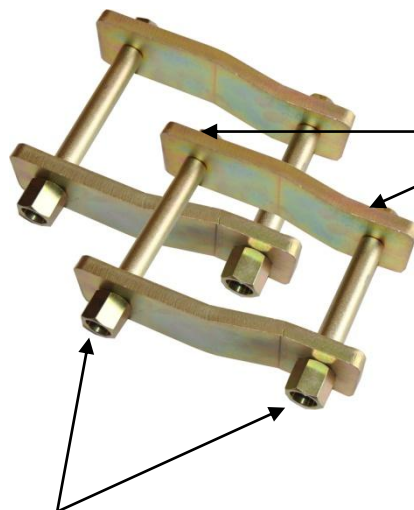

Tighten pins using the small nut only. The other end of the pin is threaded & will tighten as the small nut tightens.

Large lock nut – DO NOT TRY to tighten pins using this NUT.
Nip this Large Lock Nut up once the pins have been tightened by the SMALL NUT at the other end only.