

**VEHICLE** Toyota Landcruiser 300 Series 2022+

**PRODUCT** Dual Battery Tray

**PRODUCT CODE** BT106\_BLACK

**NOTE** Suggested fitment of dual battery set up to be completed by a qualified 12V automotive technician.  
Roadsafe Dual Battery Tray is designed to accommodate a maximum of 2 x N70 batteries.

#### TOOLS REQUIRED:

- 12mm Socket

#### HARDWARE SUPPLIED:

- 1 x Dual Battery Tray
- 1 x Dual Battery Tray Strap
- 3 x Battery Tie Down
- 3 x M8 Washer
- 3 x M8x1.25 Flange Nut

1. Unclip and remove battery cover exposing vehicle cranking battery.
2. Unclip and remove top skuttle plate section above battery for easy access.
3. Remove 2 x M12 bolts clamping the battery in place. Loosen terminals and remove battery.
4. Remove M12 x 9 bolts to release factory battery tray, retain factory hardware.  
Note: There are two layers that form the OE battery tray. Remove both.  
See figure 1.
5. Insert Roadsafe Auxiliary Battery Tray and bolt into position using 7 of the factory M12 bolts.  
See figure 2.
6. Place both batteries side by side. Depending on application will determine which direction terminals will face.



Figure 1



Figure 2

**VEHICLE** Toyota Landcruiser 300 Series 2022+

**PRODUCT** Dual Battery Tray

**PRODUCT CODE** BT106\_BLACK

**NOTE** Suggested fitment of dual battery set up to be completed by a qualified 12V automotive technician.  
Roadsafe Dual Battery Tray is designed to accommodate a maximum of 2 x N70 batteries.

**7.** Before positioning and securing battery strap over batteries, ensure the appropriate wiring is complete as the rear most terminals will be difficult to access once secured.  
**It is recommended this be completed by a qualified 12v automotive technician.**

**8.** Position the top battery strap over the batteries and secure using supplied battery tie downs, washers, and flange nuts.  
See figure 3.

**9.** Now with both batteries in position, proceed to wire batteries into the desired configuration.

**10.** Once both batteries have been fully installed back into the system, return the removed plastic skuttle plate to its original position.

**11.** Depending on dual battery configuration, re-attach the top plastic battery cover.  
See figure 4.

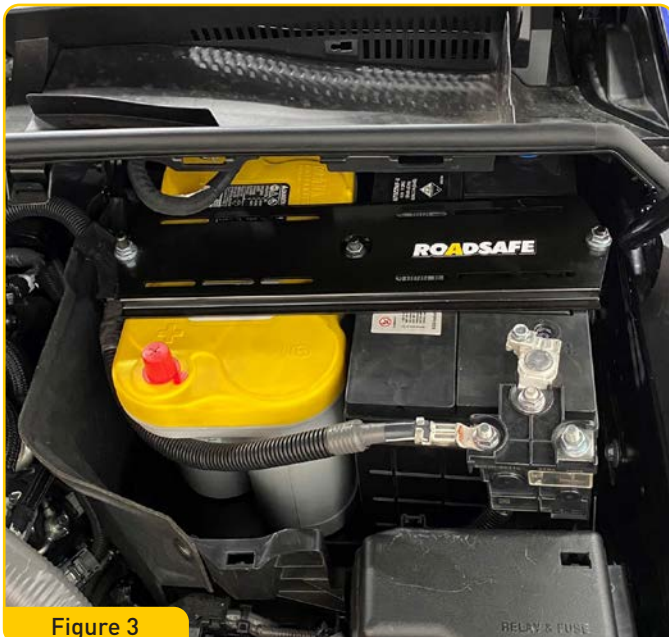


Figure 3



Figure 4